Shredding



APPLICATION

Designed for liberating steel wire from rubber content in pre-shredded tires, resulting in a more useful end product. This provides a cleaner end product that has much more recycling value than traditional TDF.


FEATURES


- Fully Hard-Faced Rotor
- Reinforced Floor, Ram, T. Arm, Wipers, Motor Mount
- 24" Riser Base Included
- Double Sidewall at Rotor
- "Smart" Ram Programming
- Touch Pad Monitoring & Control
- Tramp Metal Protection
- 4-Way, Indexable Cutting Inserts
- PLC Control Panel
- ISO 9001 Manufactured

- Easy Access Screen
- Outboard Rotor Bearing Package
- Double Row Cutters
- Hardox Manganese-Alloy Sidewalls
- Smart Ram Programming Package
- Heavy-Duty Ram and Wiper Package
- Hardened Extended-Life Counterknife
- 24Đ Machine Base
- Wear Resistant Floor
- Hardox Screen



1800 RTR



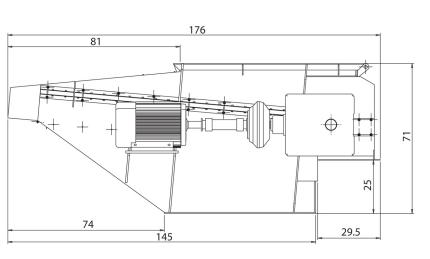

front view

side view

SPECIFICATIONS

Hopper Opening	inch	70x82
Hopper Volume	cubic yards	10.25
Rotor Diameter	inch	20
No. of Cutters	qty	84 (40x40)
Rotor Speed	rpm	125
Drive Motor HP	HP	150
Feed System	HP/speed	10 / 2
Machine Weight	lbs	18,000 - 22,000
Voltage	V/PH/Hz	460/3/60

OPTIONS

- Energy Saving HiTorcD Drive Package
- Optional Water Cooler Rotor
- Optional Control Brands

- Quick Disconnect / Quick Clean Screens
- Application Specific Programming
- High Speed Ram

Vecoplan, LLC

P.O. Box 7224 • High Point, NC 27264

Phone: 336•861•6070 Fax: 336•861•4329

